



Experience Quality
with Confidence..




TIPPER GROUP

ACCORDION DAMPER





LENGTH	10,000-12,000 mm
BASE HEIGHT	1.200-1.250mm
WEIGHT	7640kg
AXLE	3x9000 Kg carrying capacity, Drum or Disc Reis or Imported (BPW, SAF or Equivalent) AKS Group
CHASSIS	Automated submerged arc welding with I-section made of high-strength steel material specially produced for Seykon Formed by the method 98/91. Seykon Chassis in compliance with EEC standards
BRAKES	Automatic load adjustment valve RSS (Corner Safety System) Brake System in accordance with 71/320 EEC and 2002/78 EC Standards, Wabco 2S2M system
AXLE LIFTING	Front axle lifting system that prevents tire wear and provides ease of turns
LANDING GEAR	Double speed GOS Brand mechanical leg with 24 tons carrying capacity
KING PIM	2" Flange type Imported (Saf, Jost or equivalent) King Pin in 94/20 EEC norms
REAR BUMPER	Dip galvanized (against abrasion and rust) in accordance with 70/221/EC Standards and tested durable) movable rear bumper (compatible with Asphalt pouring machine Finisher)
SUSPENSION SYSTEM	Height adjuster system with air lowering and lifting. Compatible with short-shear asphalt pouring machine finisher and shock absorber elements that limit excessive axle movement. System that automatically lowers the suspension when the damper is raised
ELECTRICAL EQUIPMENT AND LIGHTING	3 Amber colored lamps on the sides, Parking lamps, license plate lamp, triangle reflector at the rear. (Electrical system, complete E approved) 2 Visual warning that gives an audible warning to warn the driver and is in the driver's direct field of vision will be compatible with the system.
TOOLBOX	Plastic tool cabinet measuring 60x50x50 cm
WATER TANK	30 Lt Plastic Water Tank
TIRE AND RIM	6+1 385/65/22.5 Tubeless Tires, Steel Rims
SPARE TIRE CARRIER TYPE	1 x Reducer
SUPERSTRUCTURE	Sides 6 mm , base 7mm , front wall and rear cover made of 5 mm HARDOX 450 high strength steel
HYDROCLIC SYSTEM	5-stage telescopic cylinder made of cold-drawn steel, limit control valve, direction valve, 150 lt oil tank and high pressure resistant hydraulic hose, HIDROMAS brand
MUDGUARD	Integrated with regulation-compliant mop. 6 plastic full fenders on each side
MANOMETER	Manometer showing the axle group load according to the pressure in the airbag

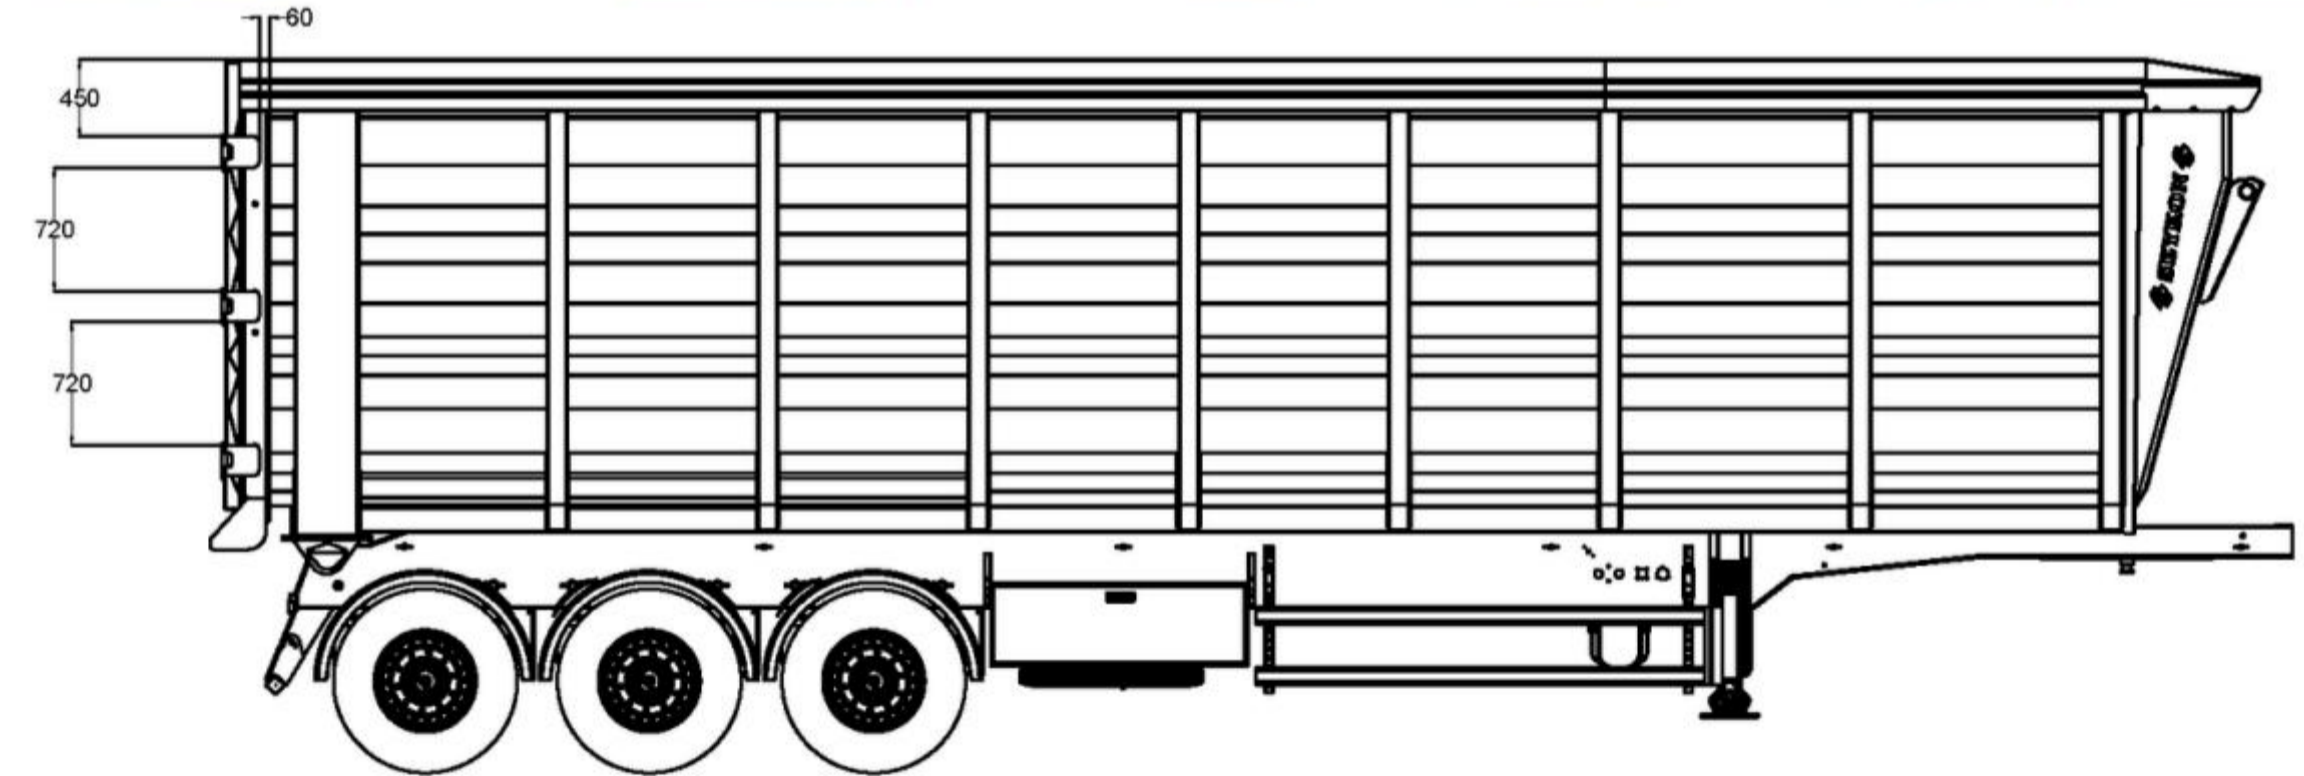

OPTIONAL

SMART BOARD

Display located next to the axle group, which shows and controls the load rate on each axle. Airbag pressure check Tire wear Lifiable axle system that reduces speed and makes it easier to maneuver when making U-turns. Daily service and total kilometers traveled slipped. Devices that record road conditions and conditions after vehicle use.

iLvl – Electronic suspension control system



SEYKON MAKINE SAN. AND TRADE LTD. İTİ

Fevzi Çakmak Mah. 10602. St. No: 16 Karatay/KONYA | +90 545 595 1663

info@seykontreyler.com | export@seykontreyler.com

SEYKONTREYLER.COM

f /seykontreyler



TSEK

