

# The New Standard of Cargo Transport..



TIPPER GROUP

HALF PIPE DAMPER




# TECHNICAL SPECIFICATIONS



## TIPPER GROUP

<b>LENGTH</b>	7.300 mm
<b>BASE HEIGHT</b>	1.200-1.250 mm
<b>WEIGHT</b>	7640 kg
<b>AXLE</b>	3x9000 Kg carrying capacity, Drum or Disc Reis or Imported (BPW, SAF or Equivalent) AKS Group
<b>CHASSIS</b>	98/91, specially produced for Seykon, made of high-strength steel material with I-section using automatic submerged arc welding method. Seykon Chassis in compliance with EEC standards
<b>BRAKES</b>	Automatic load adjustment valve RSS (Corner Safety System) Brake System, Wabco 2S2M system, in accordance with 71/320 EEC and 2002/78 EC Standards
<b>AXLE LIFTING</b>	Front axle lifting system that prevents tire wear and provides ease of turns
<b>LANDING GEAR</b>	Double speed GOS Brand mechanical leg with 24 tons carrying capacity
<b>KING PIN</b>	2" Flange type Imported (Saf, Jost or equivalent) King Pin in 94/20 EEC norms
<b>REAR BUMPER</b>	Dip galvanized (wear and rust resistant) movable rear bumper that complies with 70/221/EC Standards and has been tested (compatible with Asphalt pouring machine Finisher)
<b>SUSPENSION SYSTEM</b>	Height adjuster system with air lowering and lifting. Shock absorber elements that are compatible with the short-scissor asphalt pouring machine finisher and limit excessive axle movement. System that automatically lowers the suspension when the damper is raised
<b>ELECTRICAL EQUIPMENT AND LIGHTING</b>	3 Amber colored lamps on the sides, Parking lamps, license plate lamp, triangle reflector at the rear. (Electrical system, complete E approved) 2
<b>TOOLBOX</b>	Plastic tool cabinet measuring 60x50x50 cm
<b>WATER TANK</b>	30 Lt Plastic Water Tank
<b>TIRE AND RIM</b>	6+1 385/65/22.5 Tubeless Tires, Steel Rims
<b>SPARE BRANCH AND CARRIER TYPE</b>	1 x Reducer
<b>SUPERSTRUCTURE</b>	Sides are 6 mm, base is 7 mm, front wall and rear cover are made of 5 mm HARDOX 450 high strength steel.
<b>HİDROKLİK SİSTEM</b>	5-stage telescopic cylinder made of cold-drawn steel, limit control valve, direction valve, 150 Lt oil tank and high pressure resistant hydraulic hose, HIDROMAS brand
<b>MUDGUARD</b>	Integrated with regulation-compliant mop. 6 plastic full mudguards on each side
<b>MANOMETER</b>	Manometer showing the axle group load according to the pressure in the airbag
<b>OPTIONALS</b>	iLvl – Electronic suspension control system

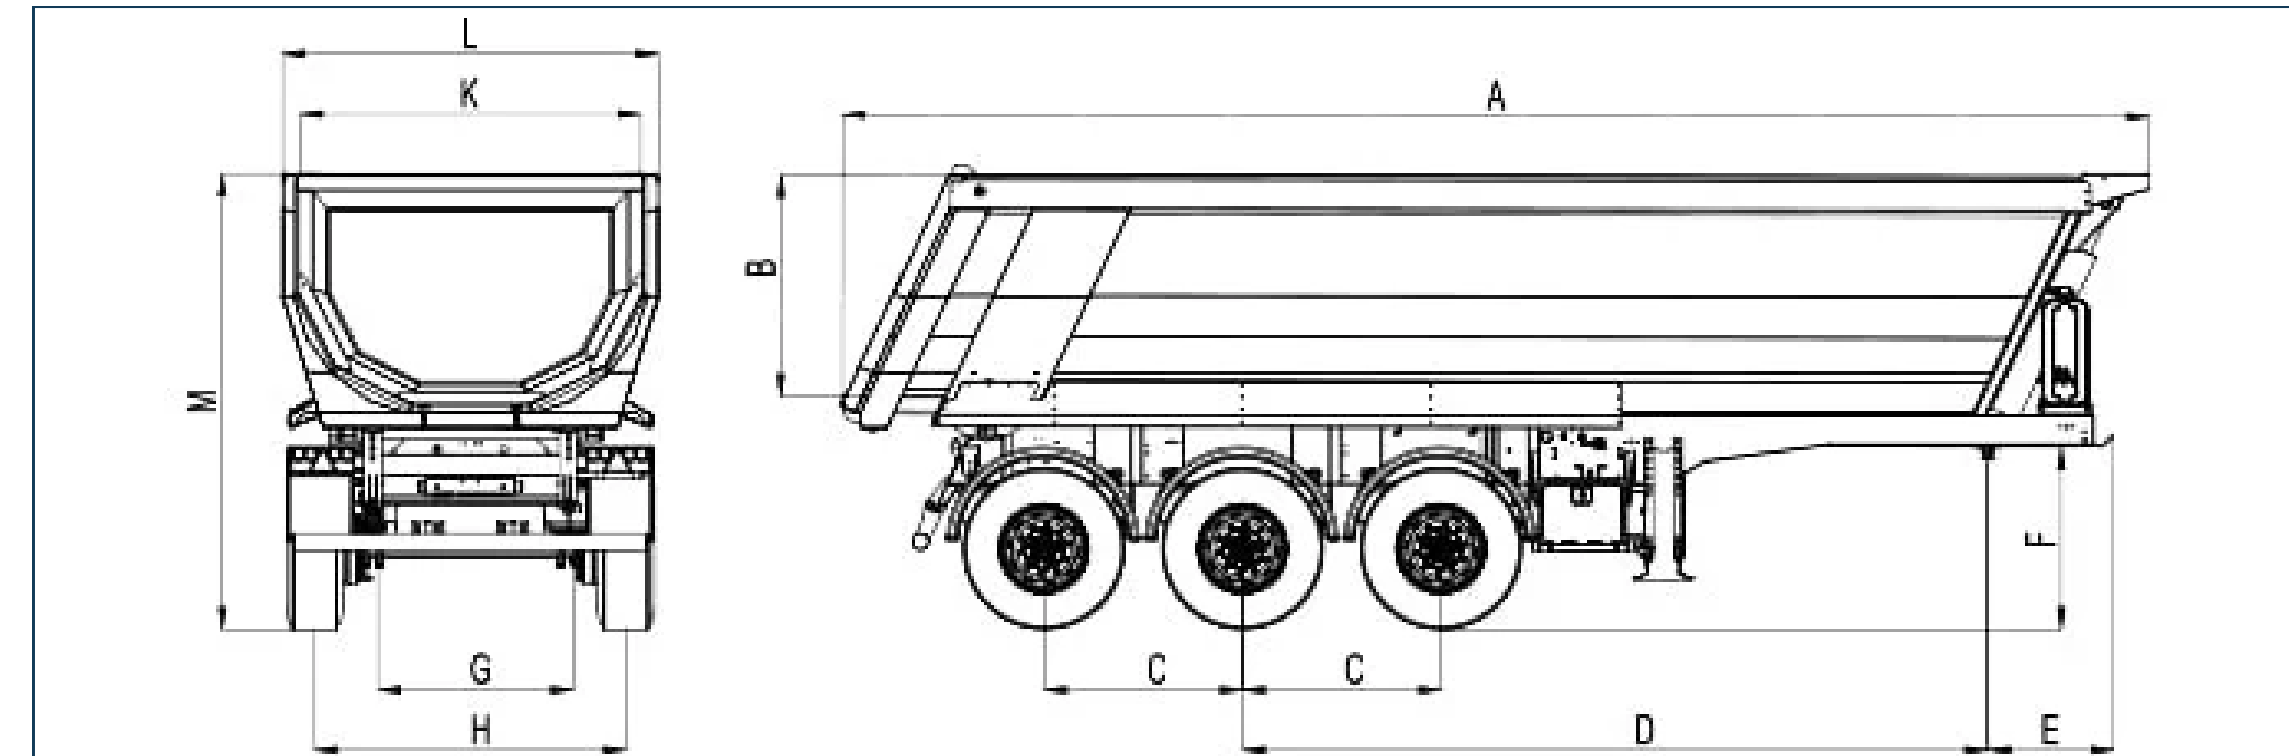

NET LENGTH (mm)	INTERNAL HEIGHT (mm)	AXLE DISTANCE (mm)	AXLE-KINGPIN CENTER RANGE (mm)	KINGPIN FRONT FRAME RANGE (mm)	RECOMMENDED 5TH WHEEL HEIGHT (mm)	CHASSIS CENTER (mm)	TIRE TRACE (mm)	INTERNAL WIDTH (mm)	EXTERNAL WIDTH (mm)	EXTERNAL HEIGHT (mm)
A	H1	C	D	AND	F	G	M	K	L	H
8700	1350	1320	4960	1000	1210-1230	1300	2056	2300	2550	2835



**SEYKON MAKİNE San. and Tic. Ltd. Ltd.**

Fevzi Çakmak Mah. 10602. St. No: 16 Karatay/KONYA | +90 545 595 1663  
info@seykontreyler.com | export@seykontreyler.com

**SEYKONTREYLER.COM**

f /seykontreyler



TSEK

